


PISTON STANDARD WATER METER - CLASS C




FEATURE:

- ✓ Model: SCH-15A3-20A3
- ✓ Accuracy: C, R160/R200
- ✓ Type: Volumetric Piston
- ✓ Material Body: Nylon Plastic
- ✓ Easy to install and maintain


PRESSURE LOSS:

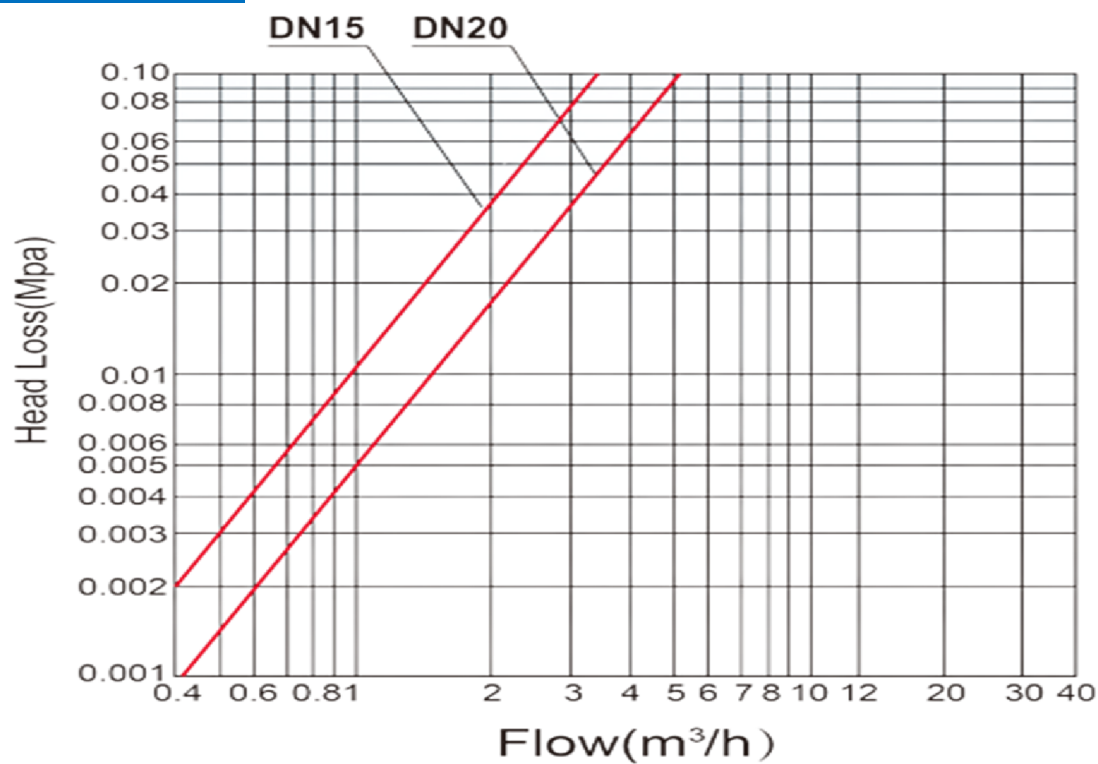

FLOW ERROR:

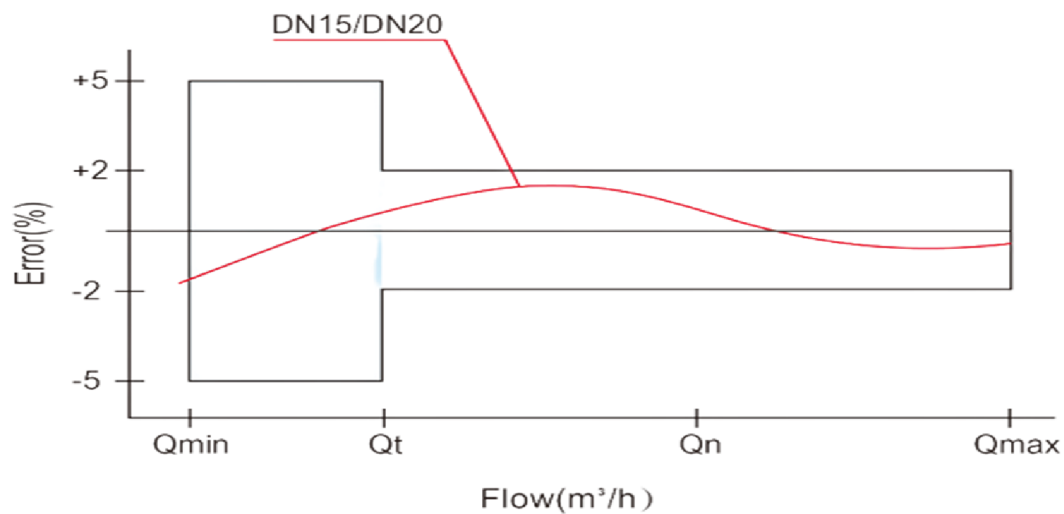

SPECIFICATIONS:

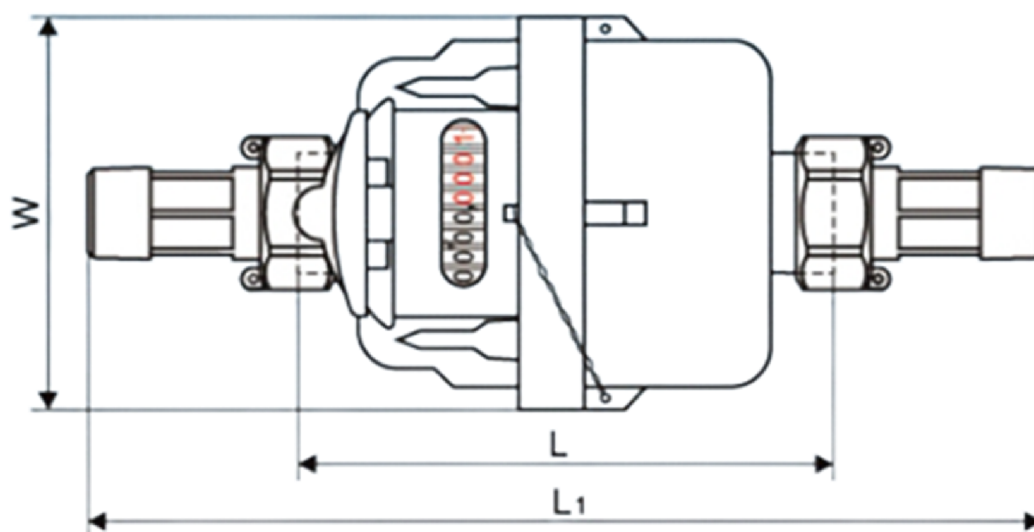

KEY SPECIFICATIONS BY ISO4064 (GB/T778.1-1996)

Size DN(mm)	Class	Q _{max} Overload flow	Q _n Nominal flow	Q _t Transitional flow	Q _{min} Min flow	Min reading	Max reading
		m ³		L/h		m ³	
15	C	3	1.5	22.5	15	0.0001	9,999
20	C	5	2.5	37.5	20	0.0001	9,999

KEY SPECIFICATIONS BY ISO4064 (GB/T778.1-2007)

Size(inch)		15(1/2")	20(3/4")
Q ₄ (m ³ /h)		3.125	5
Q ₃ (m ³ /h)		2.5	4
R160	Q ₂ (L/h)	25	40
	Q ₁ (L/h)	15.625	25
R200	Q ₂ (L/h)	20	32
	Q ₁ (L/h)	12.5	20
Min reading (m ³)		0.0001	0.0001
Max reading (m ³)		9,999	9,999
Max pressure (MAP)		16	16
Max loss (Δ P)		63	63
Max temperature		T50	T50
Output options		V _{max} =24V, I _{max} =100mA, P _{max} =2W	

PRODUCT SIZE AND WEIGHT US

Model (mm)	Length (mm)	Width (mm)	Height (mm)	Connecting Thread (D)	Weight (Kg)
SC-15A3	115	191	86	G 3/4B	0.39
SC-20A3	130	228	86	G 1B	0.5

SENCE INDUSTRIAL EQUIPMENT CO., LTD

Add : 4F, No. 13, Part 2, Beitou Rd., Beitou Dist., Taipei City, Taiwan(R.O.C)

Email: Sale.sence.tw@gmail.com

Website: <http://sencetw.com>

Tel: +886-2-28941218